

**BOSS**



**West-Coast Rentals**



**European Technology  
now in  
INDIA**



# BOSS Features



West-Coast Rentals



## Patented SNAP LOCK

Patented double action locking claws with colour coding for easy identification. Made to perfect lengths with help of laser cutting.



## Frames

Robotic welding gives Unshakable stability, cannot twist or break and have a high load bearing capacity and no risk of injury from sharp edges.




## Telescopic Stabilisers

Adjustable stabilisers for various heights with easy locking mechanism.



## Floating Spigots

For easy assembly and dismantling. 500mm Rung spacing and 250mm rung spacing on integrated ladder.

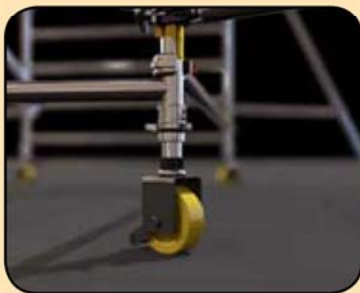

## Castors

Castor with Locking mechanism. Comes with Tyred and Non Tyred versions. Load bearing capacity of 750 Kgs and easy manoeuvrability of scaffold.



## Platform

Load bearing of 275 kg/m<sup>2</sup>. Non Slip platforms made from high quality imported birch wood, weather and water resistant, rivetted on robotic welded aluminium frames.



## Adjustable Leg

Height adjustable 250mm for millimetre perfect level adjustment.



## Toeboards

Wooden Toeboards with easy to use toe board clips. It prevents material falling from height.

### Double Width Ladder Frame

500mm Rung Pitch, 250mm Ladder Rung Pitch


Order Code	Component Name	Height (m)	Weight (kg)
	1450 "Double Width" Ladder frame		
311513	2 Rung	1.000	5.56
310513	3 Rung	1.500	8.05
309513	4 Rung	2.000	10.55



### Double Width Span Frame

500mm Rung Pitch


Order Code	Component Name	Height (m)	Weight (kg)
	1450 "Double Width" Span Frame		
305513	2 Rung	1.000	4.42
304513	3 Rung	1.500	6.13
303513	4 Rung	2.000	8.05



### Single Width Ladder Frame

500mm Rung Pitch, 250mm Ladder Rung Pitch

Order Code	Component Name	Height (m)	Weight (kg)
	850 "Single Width" Ladder Frame		
308513	2 Rung	1.000	4.65
307513	3 Rung	1.500	4.99
306513	4 Rung	2.000	6.96



### Single Width Span Frame


500mm Rung Pitch

Order Code	Component Name	Height (m)	Weight (kg)
	850 "Single Width" Span Frame		
302513	2 Rung 1.000	1.000	3.52
301515	3 Rung	1.500	4.99
300513	4 Rung	2.000	6.58



### Castor and Adjustable Leg


Order Code	Component Name	Weight (kg)
328423	Castor 150mm	3.25
335513	Adjustable Leg	1.03



### Horizontal, Diagonal, Handrail Braces

500mm Rung Pitch


Order Code	Component Name	Length (m)	Weight (kg)
312513	1.8 Horiz. (Red)	1.800	1.88
348513	2.5 Horiz. (Red)	2.500	2.37
349513	3.2 Horiz. (Red)	3.200	3.18
313513	2.1 Diag. (Blue)	2.059	2.06
314513	2.7 Diag. (Blue)	2.693	2.50
315513	3.4 Diag. (Blue)	3.353	2.95



### Fixed and Trapdoor Decks


500mm Rung Pitch

Order Code	Component Name	Length (m)	Weight (kg)
303511	Fixed Deck 3.2m	3.200	24.95
302511	Fixed Deck 2.5m	2.500	18.83
301511	Fixed Deck 1.8m	1.800	13.61
306511	Trapdoor Deck 3.2m	3.200	25.64
305511	Trapdoor Deck 2.5m	2.500	19.15
304511	Trapdoor Deck 1.5m	1.800	14.35
307511	Fully Hinged Deck 1.8m	1.800	18.20




### Stabilisers

Order Code	Component Name	Max ext (m)	Weight (kg)
317513	Stabiliser SP7	1.227	5.80
318513	Stabiliser SP10	2.212	9.07
319513	Stabiliser SP15	2.798	12.70




### Toeboards and Clips

Order Code	Component Name	Dim B (m)	Weight (kg)
302509	End Toeboard 600mm	0.585	1.04
303509	End Toeboard 1200mm	1.185	2.11
304509	Side Toeboard 1.8m	1.790	3.18
305509	Side Toeboard 2.5m	2.490	4.42
306509	Side Toeboard 3.2m	3.190	5.67
301509	Toeboard Clip		0.32
313509	Lift shaft Toeboard 1.3m	1.290	2.31

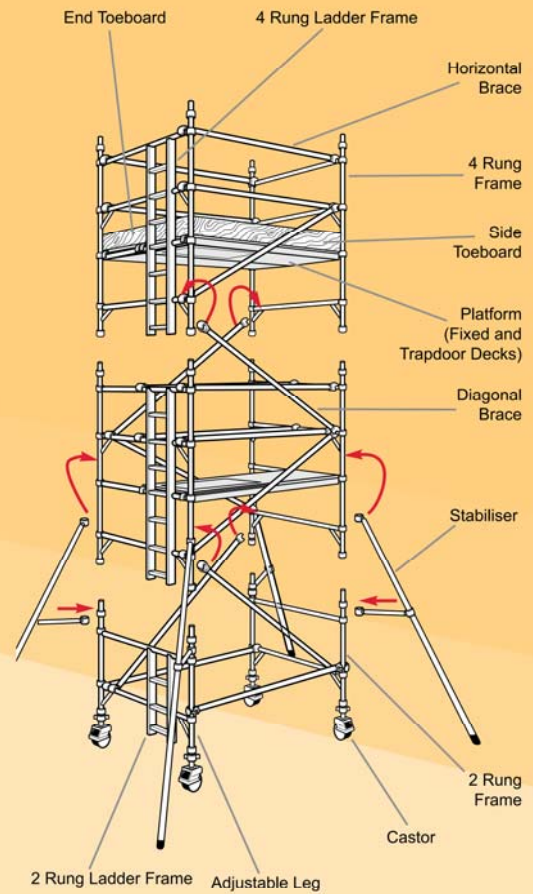


## Foot Prints

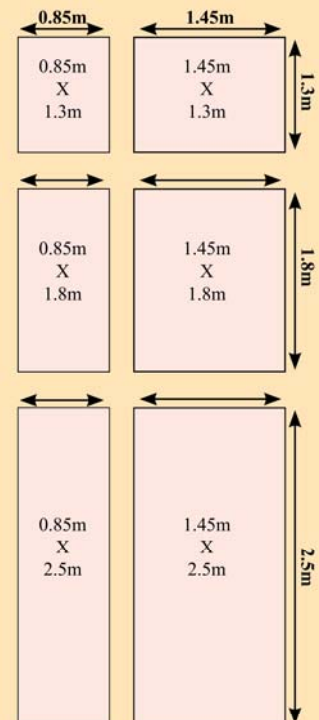

# BOSS Innovative Applications



West-Coast Rentals

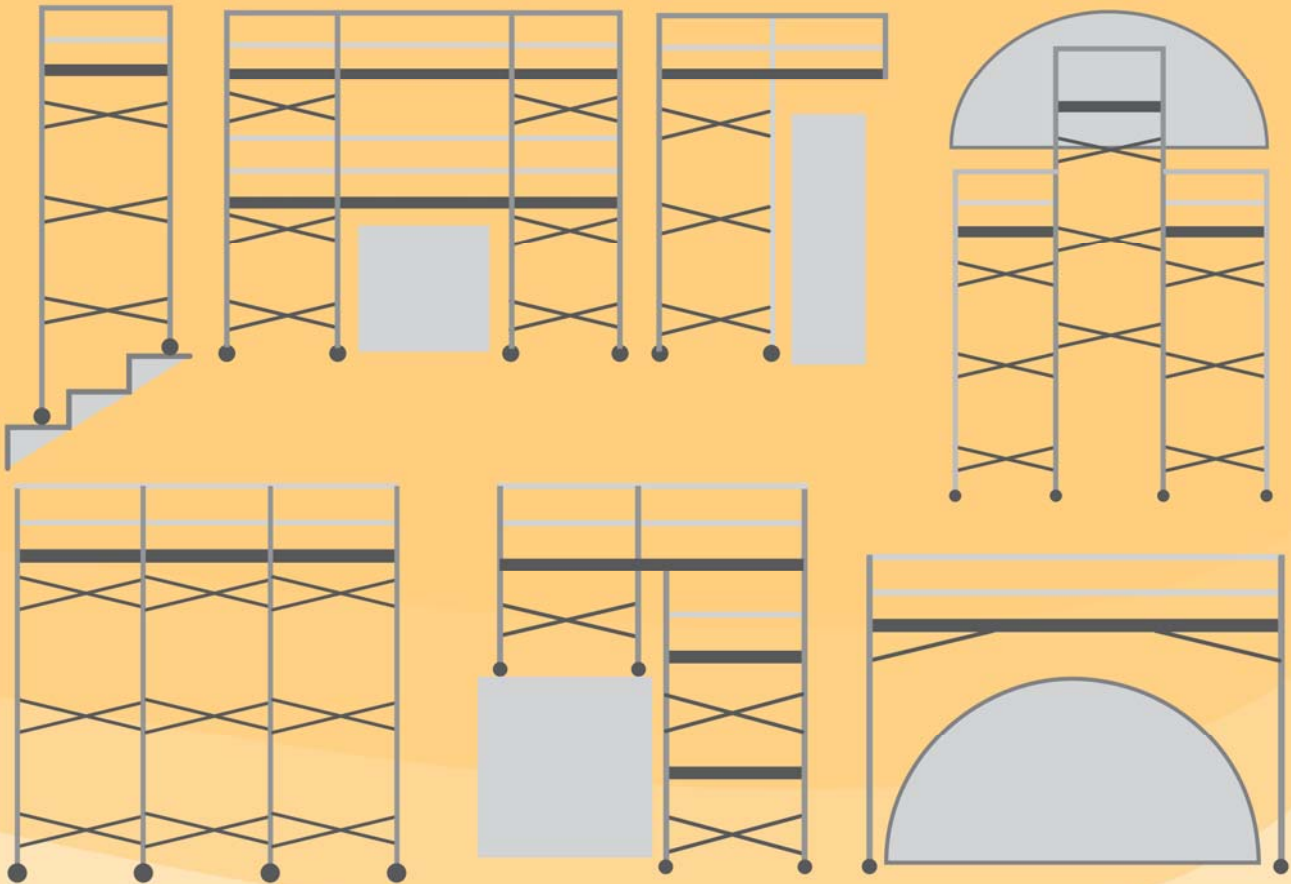

## Why West Coast Rentals ?




### Quality Points

- BSI EN 1004:2004 Certification.
- TUV NÖRD EN 1004:2004 Certification.
- ISO 1004 Certification.
- Approved to DIN 4113\3 by SLV München and ISO 3834 by TUV
- To ensure corrosion robustness critical items are plated to a minimum of 8 microns and clear passivate
- Everyday a frame is fatigue tested 57,000 cycles (10 Years Life) to ensure repeatability of our weld process. The same frame is then inspected with DYE penetrant to ensure robustness of the joints. It is then sectioned and macro and micro inspected to ensure nothing has changed within the weld.
- All our raw materials are mill or foundry certified to ISO 10204:3.1B.
- Our locking claws can be traced exactly to the melt of the molten alloy.
- Each claw is tested four times throughout assembly and manufacturing to ensure it latches every time.




# MINIMAX

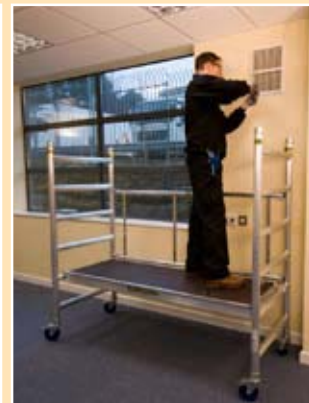

## Features

- Lightweight & Modular
- Available in packs
- Indoor and outdoor use
- Fits through standard doorways & corridors
- Versatile 260 mm stepped heights platform adjustment
- Snap click fittings for ease of assembly
- Locking castors for ease of mobility and stability
- One person operation of base Unit
- Base Unit Guardrail Pack available
- Easy to transport and store
- Extension packs can be build using the 3T
- The maximum platform S.W.L is 200 kg

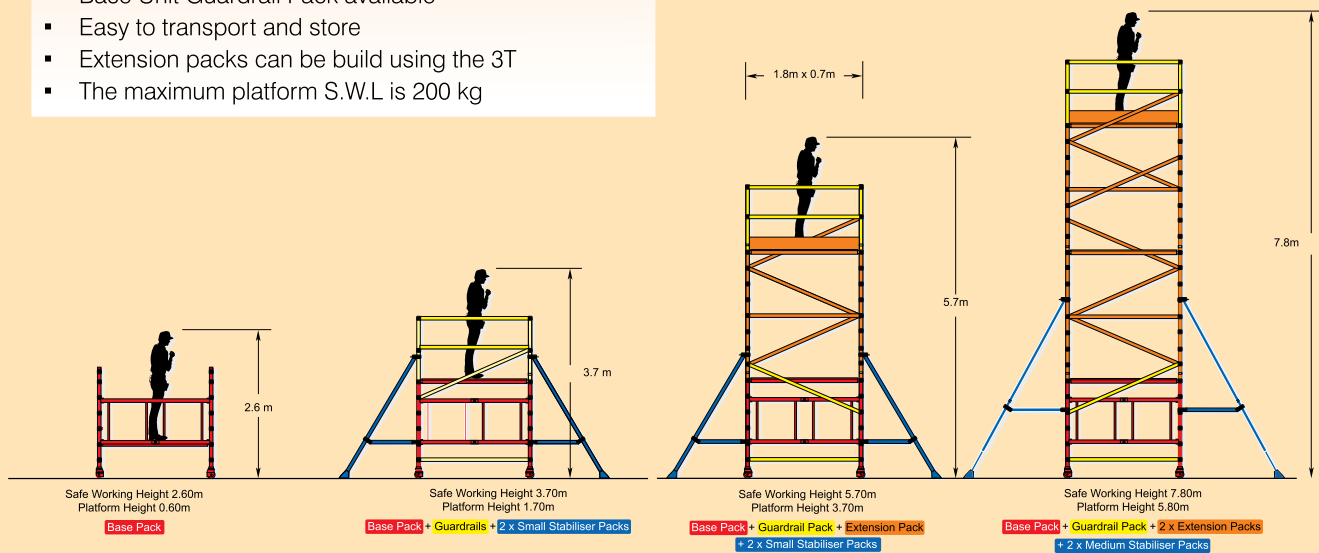



Event Decoration - 12m



Power Plant Maintenance - 8m



Bridge Structure 6m wide - 4m




Access on Stairs — 3m



Fit out Events — 9m



Tank Installation — 6m

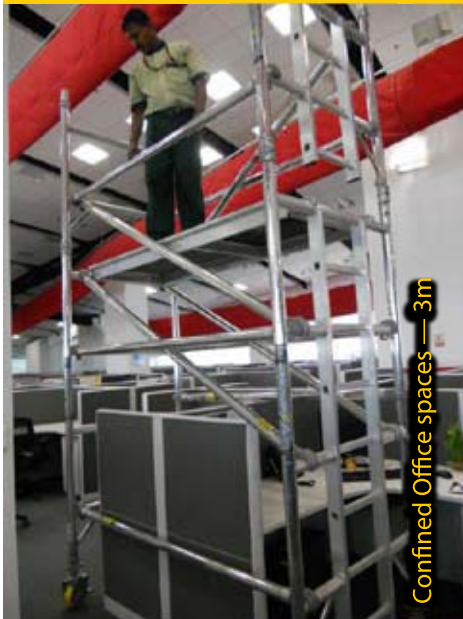

Confined Office spaces — 3m



Mall Interior — 22m



Auditorium — 12m



Hotel Lobby — 9m



Metro Rail Station — 5m



West-Coast Rentals

Shed No 23, Atladra Industrial Estate,  
Atladra, Vadodara - 390012  
Gujarat, India.

Mobile : +91 9825789154  
Email : info@westcoastrentals.in  
Website : www.westcoastrentals.in